

TAB9-6S 6位數BCD動態輸入顯示器


DIN 96×48 mm

特點：

- ◎ 紅色LED, 字體高度0.56"(14.2mm).
- ◎ NPN/PNP兩用輸入介面.
- ◎ 10~15字元有4種選擇為:
-,E,H,L,P,blank; 或 A,b,c,d,E,F.
- ◎ 可設定小數點:無;1位;2位;3位.
- ◎ 可由Pin-11~16作閃爍控制.
- ◎ 有顯示模組16(4-Bits) 定址設定.
- ◎ 有顯示模組制能控制.
- ◎ 輸入信號及工作電壓DC 12~24V
- ◎ 外型尺寸: DIN 96×48×80 mm.
- ◎ 開孔尺寸: DIN 92×44 mm.




方塊圖：

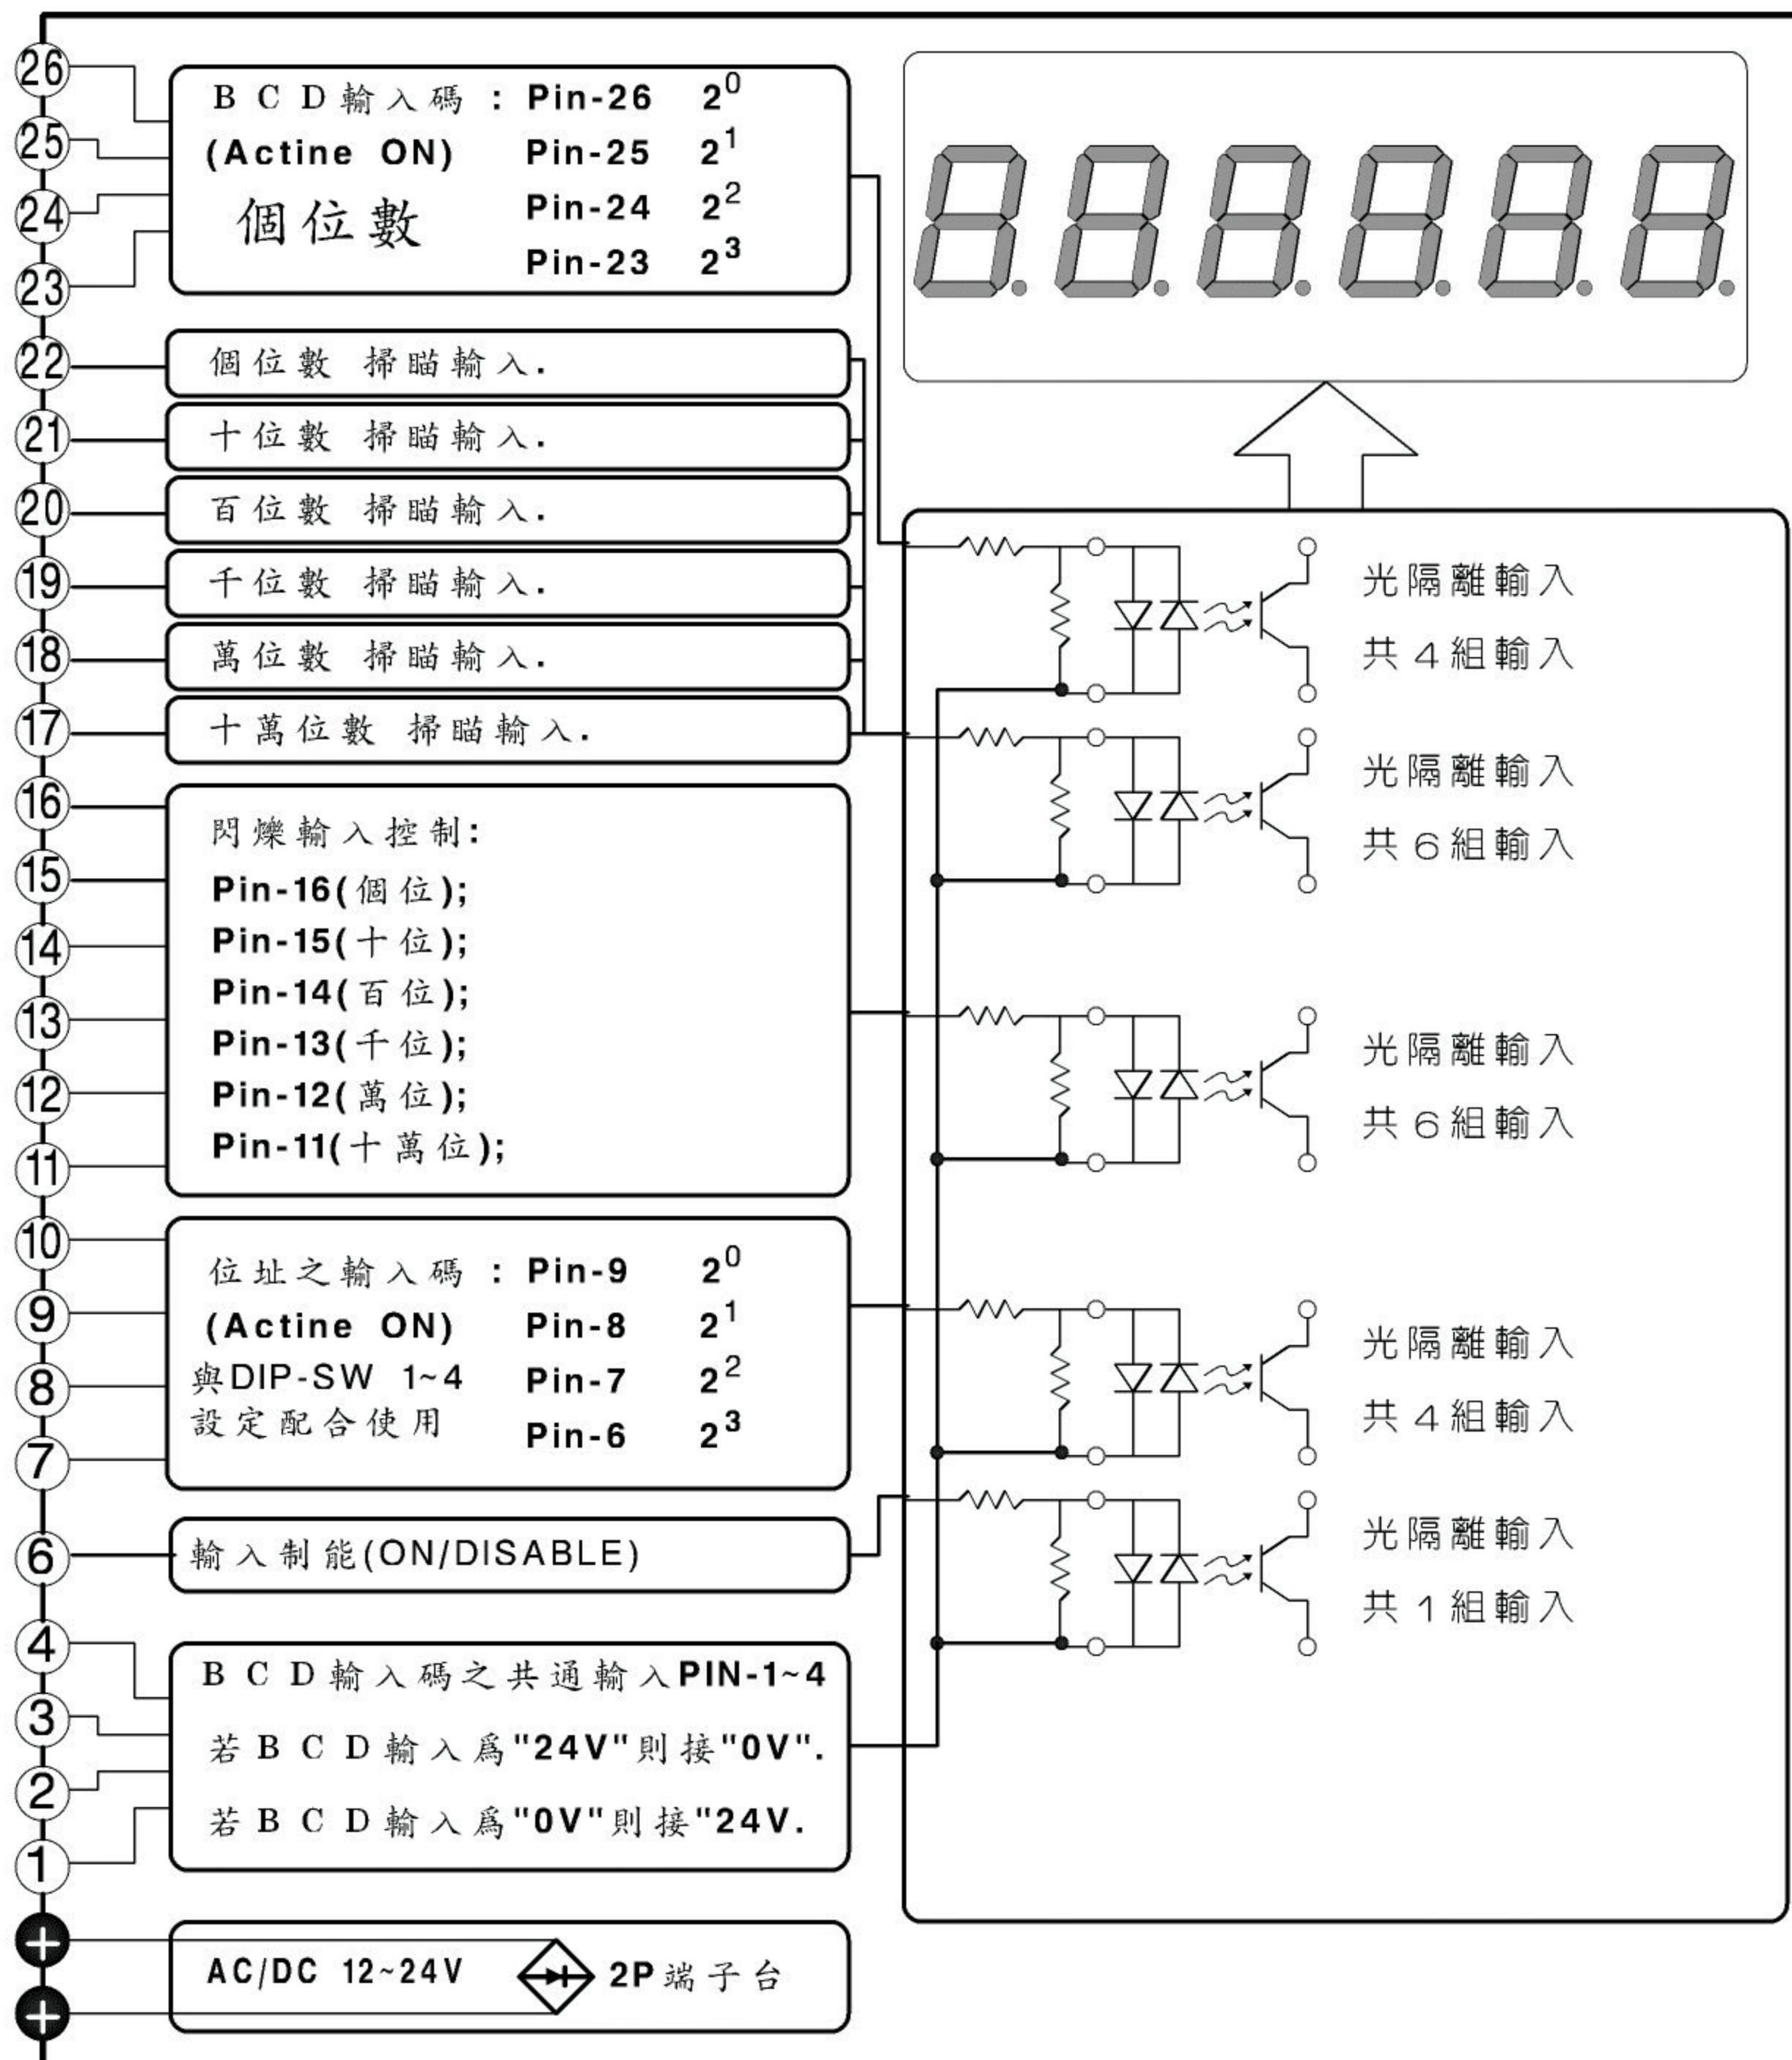

真值表: 0 = off; 1 = on

BCD輸入 Pin 23~26				位數 Pin 17~22	閃爍 Pin 11~16	鎖定 Pin 6	顯示	
B8	B4	B2	B1					
0	0	0	0	0	0	0		0
0	0	0	1	0	0	0		1
0	0	1	0	0	0	0		2
0	0	1	1	0	0	0		3
0	1	0	0	0	0	0		4
0	1	0	1	0	0	0		5
0	1	1	0	0	0	0		6
0	1	1	1	0	0	0		7
1	0	0	0	0	0	0		8
1	0	0	1	0	0	0		9
1	0	1	0	0	0	0	-	A
1	0	1	1	0	0	0	E	b
1	1	0	0	0	0	0	H	c
1	1	0	1	0	0	0	L	d
1	1	1	0	0	0	0	P	E
1	1	1	1	0	0	0		F
X	X	X	X	1	X	0		字碼存入
X	X	X	X	X	1	0		顯示閃爍
X	X	X	X	X	X	1		禁止存入

連接器接線圖：

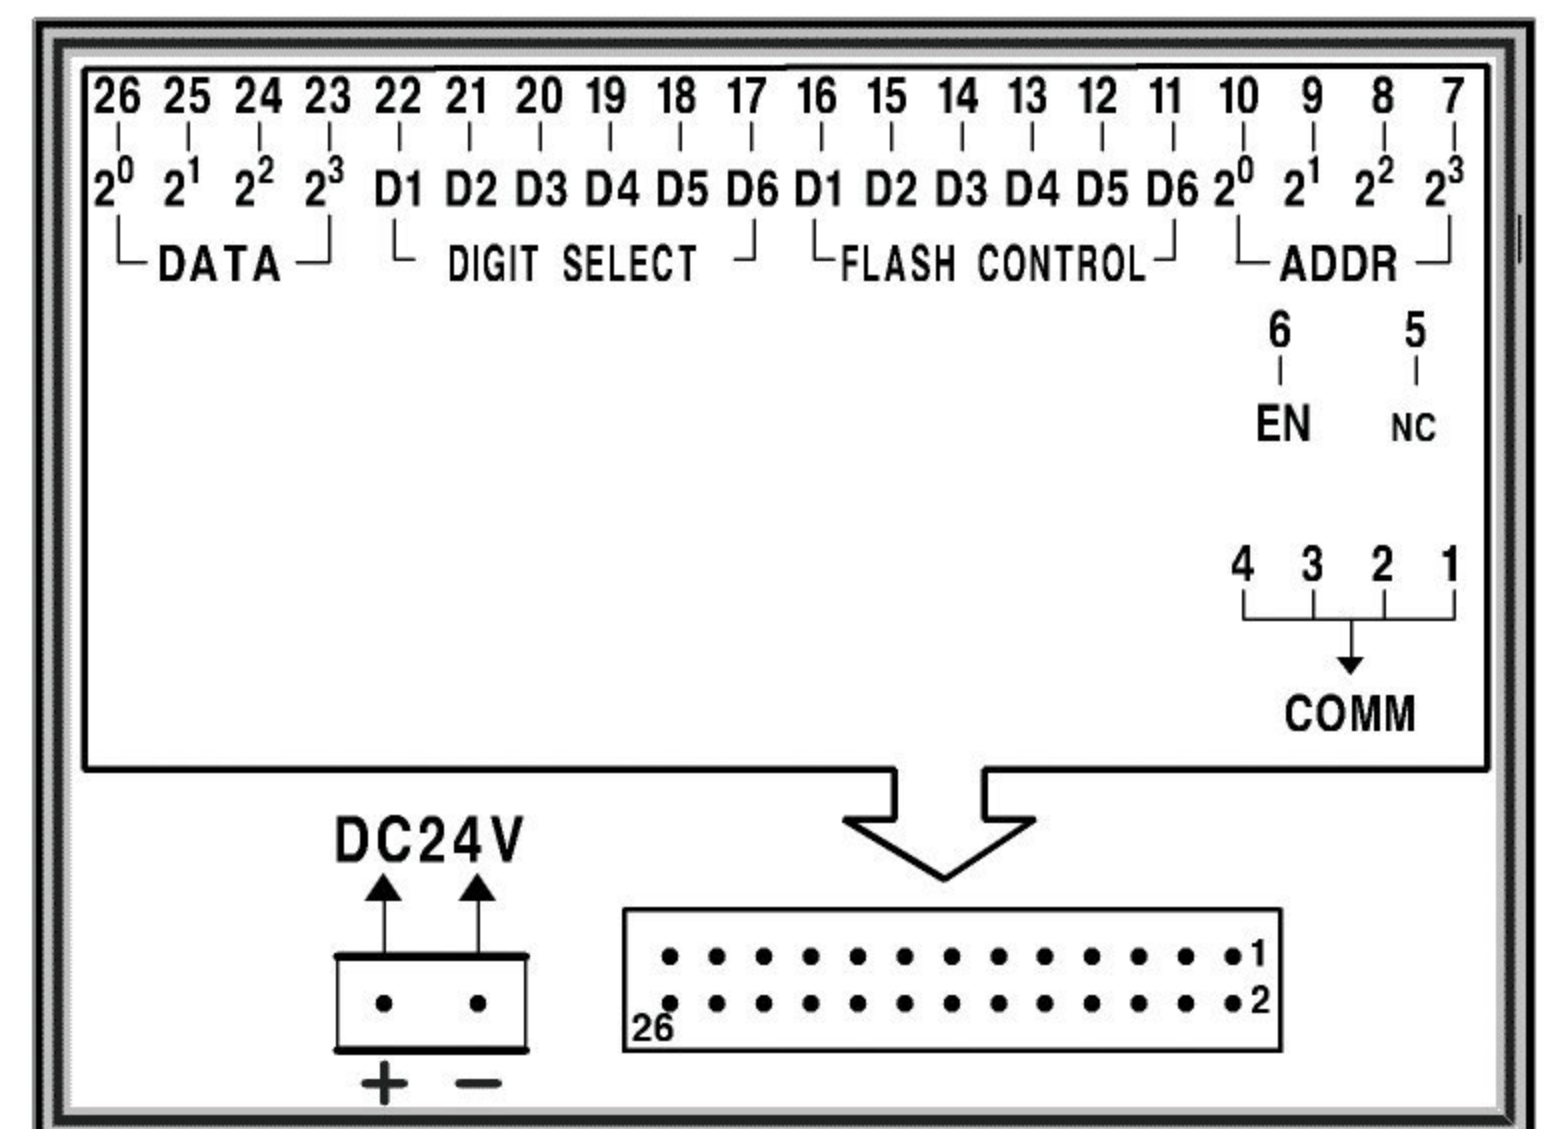

尺寸圖：

